




Aluminum Tube Stock List

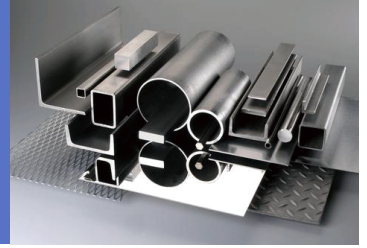


Product Catalog

Chalco offers a wide range of 7075 aluminum tubes, including round tubes, seamless tubes, and cold drawn seamless aluminum tube, ensuring consistent quality and reliability. We support small-batch orders and provide quick, efficient service for both spot and custom products.


| | |
|--|---|
| 7075 T6 Aluminum round pipe tube..... | 1 |
| 7075 T6 Seamless aluminum pipe tube..... | 3 |
| 7075 T6 Cold drawn seamless aluminum tube..... | 7 |



Aluminum Tube Stock List

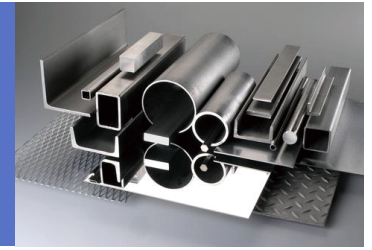

7075 T6 Aluminum round pipe tube




Specs: ASTM B210, ASTM B221

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|--------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 1.969 | 0.394 | 236.220 | 2.375 | 3.531 | 50 | 10 | 6000 |
| 2.362 | 0.394 | 236.220 | 2.968 | 4.414 | 60 | 10 | 6000 |
| 2.756 | 0.394 | 236.220 | 3.562 | 5.297 | 70 | 10 | 6000 |
| 3.150 | 0.394 | 153.543 | 4.156 | 6.180 | 80 | 10 | 3900 |
| 3.937 | 0.394 | 236.220 | 5.343 | 7.945 | 100 | 10 | 6000 |
| 3.937 | 0.787 | 137.795 | 9.499 | 14.125 | 100 | 20 | 3500 |
| 4.331 | 0.394 | 236.220 | 5.937 | 8.828 | 110 | 10 | 6000 |
| 4.331 | 0.787 | 149.606 | 10.686 | 15.890 | 110 | 20 | 3800 |
| 4.724 | 0.394 | 236.220 | 6.531 | 9.711 | 120 | 10 | 6000 |
| 4.724 | 0.787 | 137.795 | 11.874 | 17.656 | 120 | 20 | 3500 |
| 5.118 | 0.787 | 137.795 | 13.061 | 19.421 | 130 | 20 | 3500 |
| 5.512 | 0.787 | 118.110 | 14.248 | 21.187 | 140 | 20 | 3000 |
| 6.693 | 1.575 | 118.110 | 30.872 | 45.905 | 170 | 40 | 3000 |
| 7.087 | 1.575 | 125.984 | 33.246 | 49.436 | 180 | 40 | 3200 |
| 7.165 | 0.866 | 236.220 | 20.898 | 31.074 | 182 | 22 | 6000 |
| 8.268 | 1.575 | 86.614 | 40.371 | 60.030 | 210 | 40 | 2200 |

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|--------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 8.661 | 1.575 | 78.740 | 42.745 | 63.561 | 220 | 40 | 2000 |
| 9.055 | 1.575 | 94.488 | 45.120 | 67.092 | 230 | 40 | 2400 |
| 9.134 | 0.965 | 236.220 | 30.182 | 44.879 | 232 | 24.5 | 6000 |
| 9.449 | 1.575 | 70.866 | 47.495 | 70.623 | 240 | 40 | 1800 |
| 9.843 | 1.575 | 66.929 | 49.870 | 74.154 | 250 | 40 | 1700 |

- Standard aluminum pipe lengths are 2.5m, 3m, 4m, and 6m, with custom lengths up to 15m available.
- We offer cutting, punching, bending, and wall expansion services for all pipes.
- All stock products are available for retail, and orders will be processed and shipped within one week.
- As a one-stop aluminum supplier, we offer discounts for bulk purchases.
- All stock weights are density-based estimates and may differ from actual weights.

7075 T6 Seamless aluminum pipe tube



Specs: ASTM B241,ASTM B210,MIL-T-7081,AMS-WW T-700/7

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|-------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 0.709 | 0.118 | 98.425 | 0.267 | 0.397 | 18 | 3 | 2500 |
| 0.748 | 0.079 | 98.425 | 0.202 | 0.300 | 19 | 2 | 2500 |
| 1.181 | 0.197 | 98.425 | 0.742 | 1.103 | 30 | 5 | 2500 |
| 1.378 | 0.197 | 98.425 | 0.891 | 1.324 | 35 | 5 | 2500 |
| 1.575 | 0.197 | 98.425 | 1.039 | 1.545 | 40 | 5 | 2500 |
| 1.575 | 0.394 | 98.425 | 1.781 | 2.648 | 40 | 10 | 2500 |
| 1.575 | 0.591 | 98.425 | 2.226 | 3.310 | 40 | 15 | 2500 |
| 1.772 | 0.197 | 98.425 | 1.187 | 1.766 | 45 | 5 | 2500 |
| 1.772 | 0.394 | 98.425 | 2.078 | 3.090 | 45 | 10 | 2500 |
| 1.772 | 0.591 | 98.425 | 2.672 | 3.973 | 45 | 15 | 2500 |
| 1.969 | 0.197 | 98.425 | 1.336 | 1.986 | 50 | 5 | 2500 |
| 1.969 | 0.394 | 98.425 | 2.375 | 3.531 | 50 | 10 | 2500 |
| 1.969 | 0.591 | 98.425 | 3.117 | 4.635 | 50 | 15 | 2500 |
| 2.165 | 0.197 | 98.425 | 1.484 | 2.207 | 55 | 5 | 2500 |
| 2.165 | 0.394 | 98.425 | 2.672 | 3.973 | 55 | 10 | 2500 |
| 2.165 | 0.591 | 98.425 | 3.562 | 5.297 | 55 | 15 | 2500 |
| 2.362 | 0.197 | 98.425 | 1.633 | 2.428 | 60 | 5 | 2500 |
| 2.362 | 0.394 | 98.425 | 2.968 | 4.414 | 60 | 10 | 2500 |
| 2.362 | 0.591 | 98.425 | 4.007 | 5.959 | 60 | 15 | 2500 |
| 2.559 | 0.197 | 118.110 | 1.781 | 2.648 | 65 | 5 | 3000 |
| 2.559 | 0.394 | 118.110 | 3.265 | 4.855 | 65 | 10 | 3000 |


| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|--------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 2.559 | 0.591 | 118.110 | 4.453 | 6.621 | 65 | 15 | 3000 |
| 2.756 | 0.197 | 118.110 | 1.929 | 2.869 | 70 | 5 | 3000 |
| 2.953 | 0.394 | 118.110 | 3.859 | 5.738 | 75 | 10 | 3000 |
| 2.953 | 0.591 | 118.110 | 5.343 | 7.945 | 75 | 15 | 3000 |
| 2.953 | 0.728 | 118.110 | 6.206 | 9.227 | 75 | 18.5 | 3000 |
| 3.150 | 0.197 | 118.110 | 2.226 | 3.310 | 80 | 5 | 3000 |
| 3.150 | 0.394 | 118.110 | 4.156 | 6.180 | 80 | 10 | 3000 |
| 3.150 | 0.591 | 118.110 | 5.788 | 8.607 | 80 | 15 | 3000 |
| 3.150 | 0.787 | 118.110 | 7.124 | 10.593 | 80 | 20 | 3000 |
| 3.150 | 0.984 | 118.110 | 8.163 | 12.138 | 80 | 25 | 3000 |
| 3.543 | 0.197 | 118.110 | 2.523 | 3.752 | 90 | 5 | 3000 |
| 3.543 | 0.394 | 118.110 | 4.749 | 7.062 | 90 | 10 | 3000 |
| 3.543 | 0.591 | 118.110 | 6.679 | 9.931 | 90 | 15 | 3000 |
| 3.543 | 0.787 | 118.110 | 8.312 | 12.359 | 90 | 20 | 3000 |
| 3.543 | 0.984 | 118.110 | 9.647 | 14.345 | 90 | 25 | 3000 |
| 3.543 | 1.181 | 118.110 | 10.686 | 15.890 | 90 | 30 | 3000 |
| 3.740 | 0.394 | 118.110 | 5.046 | 7.504 | 95 | 10 | 3000 |
| 3.740 | 0.591 | 118.110 | 7.124 | 10.593 | 95 | 15 | 3000 |
| 3.740 | 0.787 | 118.110 | 8.905 | 13.242 | 95 | 20 | 3000 |
| 3.740 | 0.984 | 118.110 | 10.390 | 15.449 | 95 | 25 | 3000 |
| 3.937 | 0.394 | 118.110 | 5.343 | 7.945 | 100 | 10 | 3000 |
| 3.937 | 0.591 | 118.110 | 7.570 | 11.256 | 100 | 15 | 3000 |
| 3.937 | 0.787 | 118.110 | 9.499 | 14.125 | 100 | 20 | 3000 |
| 3.937 | 0.984 | 118.110 | 11.132 | 16.552 | 100 | 25 | 3000 |
| 3.937 | 1.181 | 118.110 | 12.467 | 18.539 | 100 | 30 | 3000 |
| 3.937 | 1.378 | 118.110 | 13.506 | 20.083 | 100 | 35 | 3000 |
| 4.331 | 0.394 | 118.110 | 5.937 | 8.828 | 110 | 10 | 3000 |

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|--------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 4.331 | 0.787 | 118.110 | 10.686 | 15.890 | 110 | 20 | 3000 |
| 4.331 | 1.181 | 118.110 | 14.248 | 21.187 | 110 | 30 | 3000 |
| 4.724 | 0.394 | 118.110 | 6.531 | 9.711 | 120 | 10 | 3000 |
| 4.724 | 0.787 | 118.110 | 11.874 | 17.656 | 120 | 20 | 3000 |
| 4.724 | 1.181 | 118.110 | 16.030 | 23.835 | 120 | 30 | 3000 |
| 5.118 | 0.197 | 118.110 | 3.711 | 5.517 | 130 | 5 | 3000 |
| 5.118 | 0.394 | 118.110 | 7.124 | 10.593 | 130 | 10 | 3000 |
| 5.118 | 0.787 | 118.110 | 13.061 | 19.421 | 130 | 20 | 3000 |
| 5.118 | 1.181 | 118.110 | 17.811 | 26.484 | 130 | 30 | 3000 |
| 5.512 | 0.394 | 118.110 | 7.718 | 11.476 | 140 | 10 | 3000 |
| 5.512 | 0.787 | 118.110 | 14.248 | 21.187 | 140 | 20 | 3000 |
| 5.512 | 1.181 | 118.110 | 19.592 | 29.132 | 140 | 30 | 3000 |
| 5.709 | 0.787 | 118.110 | 14.842 | 22.070 | 145 | 20 | 3000 |
| 5.906 | 0.394 | 118.110 | 8.312 | 12.359 | 150 | 10 | 3000 |
| 5.906 | 0.787 | 118.110 | 15.436 | 22.952 | 150 | 20 | 3000 |
| 5.906 | 1.181 | 118.110 | 21.373 | 31.780 | 150 | 30 | 3000 |
| 6.299 | 0.394 | 118.110 | 8.905 | 13.242 | 160 | 10 | 3000 |
| 6.299 | 0.591 | 118.110 | 12.913 | 19.201 | 160 | 15 | 3000 |
| 6.299 | 0.787 | 118.110 | 16.623 | 24.718 | 160 | 20 | 3000 |
| 6.299 | 1.181 | 118.110 | 23.154 | 34.429 | 160 | 30 | 3000 |
| 6.693 | 0.394 | 78.740 | 9.499 | 14.125 | 170 | 10 | 2000 |
| 6.693 | 0.591 | 78.740 | 13.803 | 20.525 | 170 | 15 | 2000 |
| 6.693 | 0.787 | 78.740 | 17.811 | 26.484 | 170 | 20 | 2000 |
| 6.693 | 1.181 | 78.740 | 24.935 | 37.077 | 170 | 30 | 2000 |
| 7.087 | 0.591 | 78.740 | 14.694 | 21.849 | 180 | 15 | 2000 |
| 7.087 | 0.787 | 78.740 | 18.998 | 28.249 | 180 | 20 | 2000 |
| 7.087 | 1.181 | 78.740 | 26.716 | 39.725 | 180 | 30 | 2000 |

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|--------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 7.480 | 0.591 | 78.740 | 15.584 | 23.173 | 190 | 15 | 2000 |
| 7.480 | 1.181 | 78.740 | 28.497 | 42.374 | 190 | 30 | 2000 |
| 7.874 | 0.394 | 78.740 | 11.280 | 16.773 | 200 | 10 | 2000 |
| 7.874 | 0.787 | 78.740 | 21.373 | 31.780 | 200 | 20 | 2000 |
| 7.874 | 1.181 | 78.740 | 30.278 | 45.022 | 200 | 30 | 2000 |
| 8.661 | 1.181 | 78.740 | 33.840 | 50.319 | 220 | 30 | 2000 |
| 9.055 | 1.575 | 78.740 | 45.120 | 67.092 | 230 | 40 | 2000 |
| 9.843 | 1.575 | 78.740 | 49.870 | 74.154 | 250 | 40 | 2000 |

- Standard aluminum pipe lengths are 2.5m, 3m, 4m, and 6m, with custom lengths up to 15m available.
- We offer cutting, punching, bending, and wall expansion services for all pipes.
- All stock products are available for retail, and orders will be processed and shipped within one week.
- As a one-stop aluminum supplier, we offer discounts for bulk purchases.
- All stock weights are density-based estimates and may differ from actual weights.

7075 T6 Cold drawn seamless aluminum tube



Specs: ASTM B210,EN754,AMS-T-700/7

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|-------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 0.197 | 0.039 | 98.425 | 0.024 | 0.035 | 5 | 1 | 2500 |
| 0.236 | 0.039 | 98.425 | 0.030 | 0.044 | 6 | 1 | 2500 |
| 0.276 | 0.039 | 98.425 | 0.036 | 0.053 | 7 | 1 | 2500 |
| 0.315 | 0.039 | 98.425 | 0.042 | 0.062 | 8 | 1 | 2500 |
| 0.315 | 0.079 | 98.425 | 0.071 | 0.106 | 8 | 2 | 2500 |
| 0.354 | 0.039 | 98.425 | 0.047 | 0.071 | 9 | 1 | 2500 |
| 0.394 | 0.039 | 98.425 | 0.053 | 0.079 | 10 | 1 | 2500 |
| 0.394 | 0.079 | 98.425 | 0.095 | 0.141 | 10 | 2 | 2500 |
| 0.433 | 0.039 | 98.425 | 0.059 | 0.088 | 11 | 1 | 2500 |
| 0.472 | 0.039 | 98.425 | 0.065 | 0.097 | 12 | 1 | 2500 |
| 0.472 | 0.079 | 98.425 | 0.119 | 0.177 | 12 | 2 | 2500 |
| 0.472 | 0.118 | 98.425 | 0.160 | 0.238 | 12 | 3 | 2500 |
| 0.512 | 0.059 | 98.425 | 0.102 | 0.152 | 13 | 1.5 | 2500 |
| 0.512 | 0.138 | 98.425 | 0.197 | 0.294 | 13 | 3.5 | 2500 |
| 0.551 | 0.039 | 98.425 | 0.077 | 0.115 | 14 | 1 | 2500 |
| 0.551 | 0.079 | 98.425 | 0.142 | 0.212 | 14 | 2 | 2500 |
| 0.551 | 0.118 | 98.425 | 0.196 | 0.291 | 14 | 3 | 2500 |
| 0.591 | 0.039 | 98.425 | 0.083 | 0.124 | 15 | 1 | 2500 |
| 0.591 | 0.079 | 98.425 | 0.154 | 0.230 | 15 | 2 | 2500 |
| 0.630 | 0.039 | 98.425 | 0.089 | 0.132 | 16 | 1 | 2500 |
| 0.630 | 0.079 | 98.425 | 0.166 | 0.247 | 16 | 2 | 2500 |

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|-------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 0.630 | 0.118 | 98.425 | 0.232 | 0.344 | 16 | 3 | 2500 |
| 0.630 | 0.157 | 98.425 | 0.285 | 0.424 | 16 | 4 | 2500 |
| 0.669 | 0.039 | 98.425 | 0.095 | 0.141 | 17 | 1 | 2500 |
| 0.669 | 0.098 | 98.425 | 0.215 | 0.320 | 17 | 2.5 | 2500 |
| 0.709 | 0.039 | 98.425 | 0.101 | 0.150 | 18 | 1 | 2500 |
| 0.709 | 0.157 | 98.425 | 0.332 | 0.494 | 18 | 4 | 2500 |
| 0.748 | 0.039 | 98.425 | 0.107 | 0.159 | 19 | 1 | 2500 |
| 0.748 | 0.059 | 98.425 | 0.156 | 0.232 | 19 | 1.5 | 2500 |
| 0.748 | 0.098 | 98.425 | 0.245 | 0.364 | 19 | 2.5 | 2500 |
| 0.787 | 0.039 | 98.425 | 0.113 | 0.168 | 20 | 1 | 2500 |
| 0.787 | 0.079 | 98.425 | 0.214 | 0.318 | 20 | 2 | 2500 |
| 0.787 | 0.118 | 98.425 | 0.303 | 0.450 | 20 | 3 | 2500 |
| 0.787 | 0.157 | 98.425 | 0.380 | 0.565 | 20 | 4 | 2500 |
| 0.866 | 0.039 | 98.425 | 0.125 | 0.185 | 22 | 1 | 2500 |
| 0.866 | 0.079 | 98.425 | 0.237 | 0.353 | 22 | 2 | 2500 |
| 0.866 | 0.118 | 98.425 | 0.338 | 0.503 | 22 | 3 | 2500 |
| 0.906 | 0.039 | 98.425 | 0.131 | 0.194 | 23 | 1 | 2500 |
| 0.906 | 0.059 | 98.425 | 0.191 | 0.285 | 23 | 1.5 | 2500 |
| 0.945 | 0.039 | 98.425 | 0.137 | 0.203 | 24 | 1 | 2500 |
| 0.945 | 0.079 | 98.425 | 0.261 | 0.388 | 24 | 2 | 2500 |
| 0.945 | 0.157 | 98.425 | 0.475 | 0.706 | 24 | 4 | 2500 |
| 0.984 | 0.039 | 98.425 | 0.142 | 0.212 | 25 | 1 | 2500 |
| 0.984 | 0.079 | 98.425 | 0.273 | 0.406 | 25 | 2 | 2500 |
| 0.984 | 0.118 | 98.425 | 0.392 | 0.583 | 25 | 3 | 2500 |
| 0.984 | 0.157 | 98.425 | 0.499 | 0.742 | 25 | 4 | 2500 |
| 1.024 | 0.079 | 98.425 | 0.285 | 0.424 | 26 | 2 | 2500 |
| 1.024 | 0.118 | 98.425 | 0.410 | 0.609 | 26 | 3 | 2500 |

| Imperial Unit | | | Unit Weight | | International Unit | | |
|---------------|---------|-----------|-------------|-------|--------------------|---------|-----------|
| OD/in | Wall/in | Length/in | Lbs/FT | Kg/m | OD/mm | Wall/mm | Length/mm |
| 1.063 | 0.079 | 98.425 | 0.297 | 0.441 | 27 | 2 | 2500 |
| 1.063 | 0.118 | 98.425 | 0.427 | 0.636 | 27 | 3 | 2500 |
| 1.102 | 0.079 | 98.425 | 0.309 | 0.459 | 28 | 2 | 2500 |
| 1.181 | 0.039 | 98.425 | 0.172 | 0.256 | 30 | 1 | 2500 |
| 1.181 | 0.079 | 98.425 | 0.332 | 0.494 | 30 | 2 | 2500 |
| 1.181 | 0.118 | 98.425 | 0.481 | 0.715 | 30 | 3 | 2500 |
| 1.220 | 0.138 | 98.425 | 0.571 | 0.850 | 31 | 3.5 | 2500 |
| 1.260 | 0.079 | 98.425 | 0.356 | 0.530 | 32 | 2 | 2500 |
| 1.260 | 0.118 | 98.425 | 0.517 | 0.768 | 32 | 3 | 2500 |
| 1.378 | 0.157 | 98.425 | 0.736 | 1.095 | 35 | 4 | 2500 |
| 1.417 | 0.079 | 98.425 | 0.404 | 0.600 | 36 | 2 | 2500 |
| 1.417 | 0.118 | 98.425 | 0.588 | 0.874 | 36 | 3 | 2500 |

- Standard aluminum pipe lengths are 2.5m, 3m, 4m, and 6m, with custom lengths up to 15m available.
- We offer cutting, punching, bending, and wall expansion services for all pipes.
- All stock products are available for retail, and orders will be processed and shipped within one week.
- As a one-stop aluminum supplier, we offer discounts for bulk purchases.
- All stock weights are density-based estimates and may differ from actual weights.



Welcome to contact us!

+86 173 4489 4490

sale@chalcoaluminum.com

No. 89, Science Avenue, Zhengzhou
High-Tech Zone, Henan, China